




521 SERIES

2mm Discrete LED

Diffused

PART NUMBER	LED COLOR
521-9630	RED
521-9631	YELLOW
521-9632	GREEN

SPECIFICATIONS

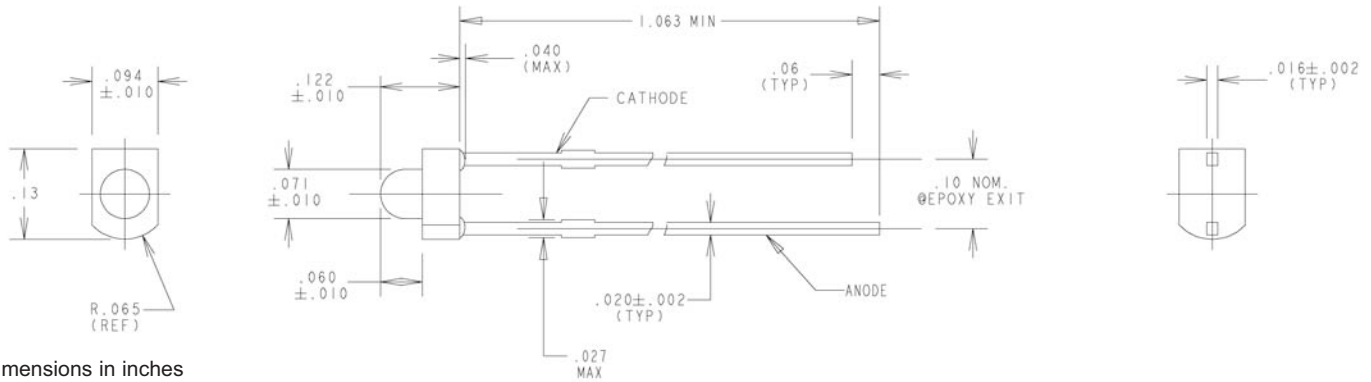

Dimensions in inches

ABSOLUTE MAXIMUM RATINGS (T _A = 25°C)	RED	YELLOW	GREEN
	-9630	-9631	-9632
Power Dissipation (mW)	105	105	105
Average Forward Current (mA)	30	30	25
Derating (mA/°C) From 25°C	0.4	0.4	.33
Peak Current (mA) Pulse width = 10μs	160	140	140
Operating Temperature (°C)	-40/+85	-40/+85	-40/+85
Storage Temperature (°C)	-40/+85	-40/+85	-40/+85
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case		

OPERATING CHARACTERISTICS (T _A = 25°C)		RED	YELLOW	GREEN
		-9630	-9631	-9632
Luminous Intensity (mcd)	Min.	8	5	5
	Typical	15	8	10
Peak Wavelength	Typical	627	590	565
Viewing Angle (2Θ ^{1/2})*	Typical	70°	70°	70°
Forward Voltage	Typical	2	2.1	2.2
	Max.	2.5	2.5	2.5
Reverse Voltage (V), I _R =100μA	Min.	5	5	5

* Θ^{1/2} is the off axis angle at which the luminous intensity is half the axial luminous intensity



Dialight Corporation
 1501 Route 34 South • Farmingdale, NJ 07727 USA
 Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com




Dialight

521 SERIES 5mm Discrete LED 3 Leaded, Non-Tinted, Diffused BI-COLOR


PART NUMBER	LED COLOR
521-9450	RED/GREEN
521-9461	YELLOW/GREEN

SPECIFICATIONS

521-9450

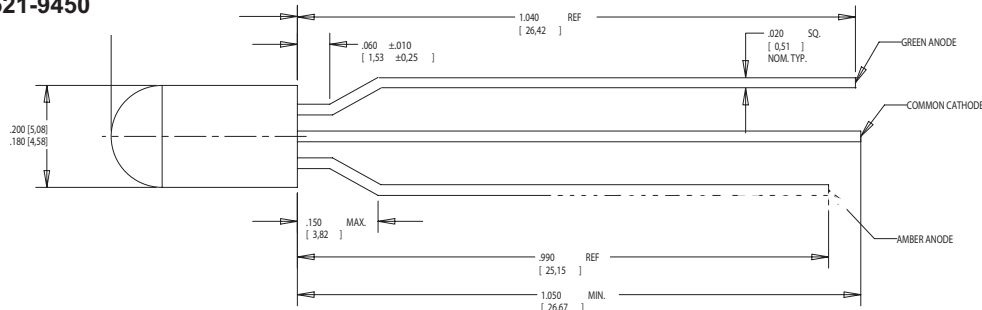

521-9461

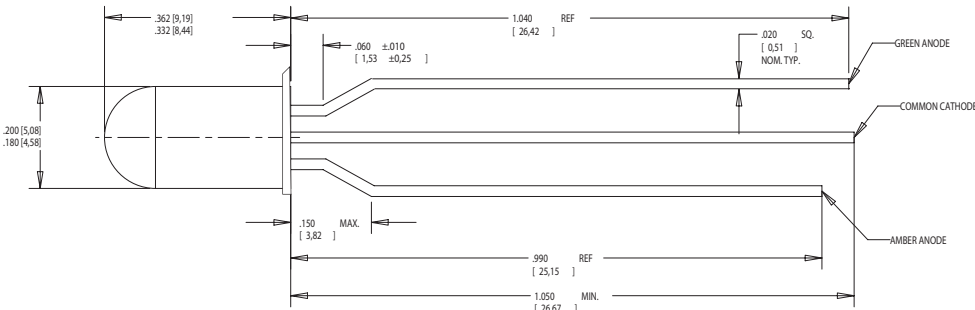

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C)

Power Dissipation (mW):	135/135	Operating Temperature (°C):	-20/+85
Average Forward Current (mA):	25/25	Storage Temperature (°C):	-55/+85
Derating (mA/°C) From 50°C	.5/.5	Soldering Temperature:	260°C, 5 seconds, 1.6 mm from case
Peak Current (mA):	90/90		

OPERATING CHARACTERISTICS (T_A = 25°C)

Part Number	Color	Peak Wavelength (nm)	Luminous Intensity (mcd)	Forward Voltage (V)*	Viewing Angle 2θ 1/2
521-9450	Red/Green	635/565	Min. 2.1/4.2 Typ. 5/8	Typ. 2.1/2.3 Max. 2.5/2.7	65°
521-9461	Yellow/Green	583/565	Min. 2.1/4.2 Typ. 5/8	Typ. 2.1/2.1 Max. 2.5/2.5	65°

*I_F = 10mA



Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



a Roxboro Group Company

MDEA521X001_A